IMET SPA
Località tre fontane, 6 - 24034
Cisano Bergamasco (BG) Italy
Tel +39 035 4387911 | Fax +39 035 787066
imet@imetsaws.com
www.imetsaws.com


MACHINE MODEL

RECORD 350

Manual and strong circular saw

Short description

RECORD 350 sawing machine is a robust and reliable saw for cutting metals (steel with a resistance of 70kg / m2). Equipped with swivel head and vice, it makes cuts from 0 ° to 45 ° to the right and left, also allowing cutting to 90 ° along the longitudinal axis.

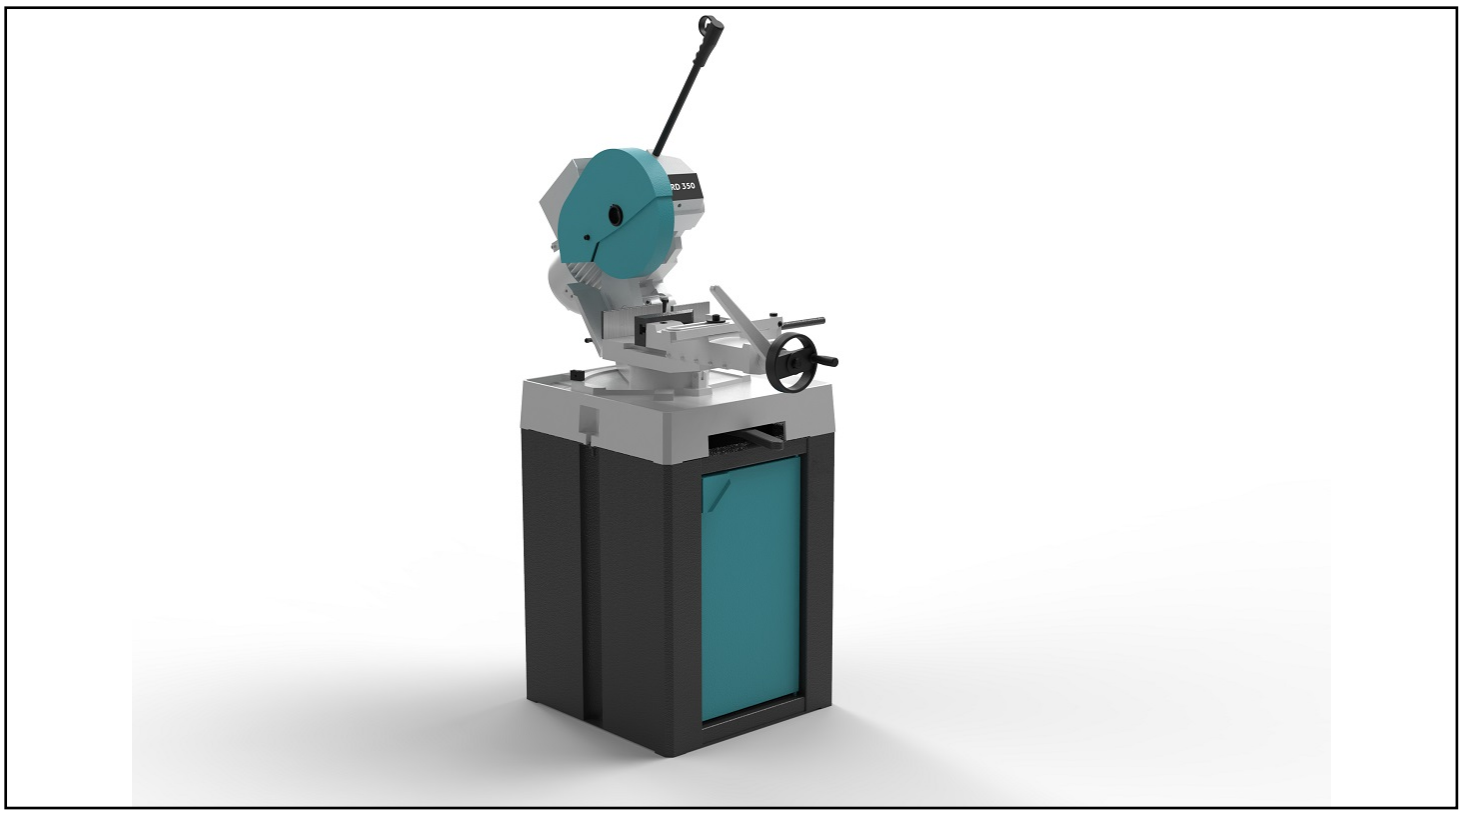

Cutting capacity at 0°	Round: 125mm - Square: 110mm - Rectangular: 160x90mm
Cutting capacity at 45°left	Round: 105mm - Square: 90mm - Rectangular: 80x100mm
Cutting capacity at 45°right	Round: 70mm - Square: 65mm - Rectangular: 60x70mm
Blade size	350mm
Blade hole	32mm
Blade speed	30/60rpm
Blade motor power	1.8/2.5KW
Coolant tank capacity	40l
Weight	206kg
Dimensions	600x1200x1060mm


IMET SPA
Località tre fontane, 6 - 24034
Cisano Bergamasco (BG) Italy
Tel +39 035 4387911 | Fax +39 035 787066
imet@imetsaws.com
www.imetsaws.com

Features



Bar stop

RECORD 350 disc saw is equipped with a standard anti-burr and adjustable bar stop for making cuts in series.

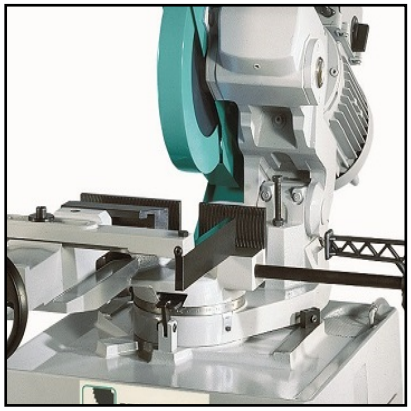

Gearbox

Bronze wheel / endless screw in oil bath with adjustable bearings and elastic coupling.



Start

The start button of RECORD 350 is located in the handle.



Vice

Screw clamp with quick locking and adjustable guides; a special lever makes it swivel and removable.

IMET SPA
Località tre fontane, 6 - 24034
Cisano Bergamasco (BG) Italy
Tel +39 035 4387911 | Fax +39 035 787066
imet@imetsaws.com
www.imetsaws.com



Stops at 0° e 45°

RECORD 350 is equipped with a system of adjustable stops at 0 ° and 45 ° on a graduated scale on the support surface.



Double vice (Optional) OPTIONAL

It's possible to order a double vice with 160mm opening.



Pneumatic vice (Optional) OPTIONAL

PNEUMATIC VICE (OPENING/CLOSING SYNCHRONYSED WITH THE HEAD MOTION)



Adjustable bar support (Optional) OPTIONAL

Bar support with adjustable height from 710 to 1100 mm. Capacity 150 kg

IMET SPA
Località tre fontane, 6 - 24034
Cisano Bergamasco (BG) Italy
Tel +39 035 4387911 | Fax +39 035 787066
imet@imetsaws.com
www.imetsaws.com



IBL floor stand (Optional) OPTIONAL



Connection machine-loading roller table (Optional) OPTIONAL

Connection between machine and loading roller table.



Connection machine-unloading roller table (Optional) OPTIONAL

Connection between machine and unloading roller table.



Loading/Unloading roller table (Optional) OPTIONAL


1st unit of roller conveyor compatible for both the loading and unloading sides. Length 2m, loading capacity 700kg.

IMET SPA
Località tre fontane, 6 - 24034
Cisano Bergamasco (BG) Italy
Tel +39 035 4387911 | Fax +39 035 787066
imet@imetsaws.com
www.imetsaws.com




Loading/Unloading roller table (Optional) OPTIONAL

Following unit of roller conveyor compatible for both the loading and unloading sides. Length:2m, loading capacity:600kg.

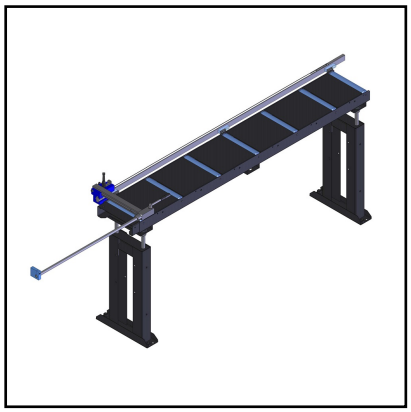

Unloading roller table with metric rod (Optional) OPTIONAL

Measuring system for the output side consisting of the RTS roller table and mechanical measuring stop with millimetric rod in assembly kit (the roller table is sent separately and the RTM stop to be assembled). The measuring stop is completely foldable.

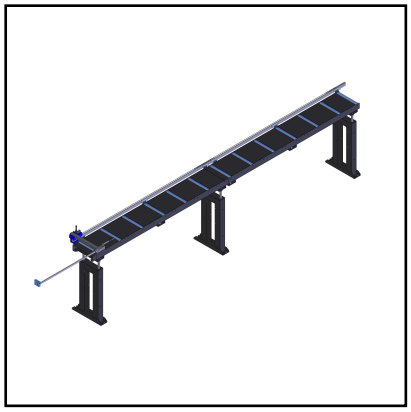

Unloading roller table with metric rod (Optional) OPTIONAL

Measuring system for the output side consisting of the RTS roller table and mechanical measuring stop with millimetric rod in assembly kit (the roller table is sent separately and the RTM stop to be assembled). The measuring stop is completely foldable. Following element for cutting lengths over 2m.



Vertical rollers (Optional) OPTIONAL

Pair of containment vertical rollers 300 mm made in steel, max 2 pairs for each element 2 m long; to use without rollers cover